# RESTAURANT RANGES



# VALUE SERIES 60" GAS RESTAURANT RANGE 10 OPEN BURNERS

Item # \_



Model V60-1







#### **SPECIFICATIONS**

60" wide gas restaurant range, Vulcan Model No. V60-1. Stainless steel front, sides, backriser, high shelf, oven handle and bullnose. High temperature burner T knobs with set screw. Nickle plated bullet feet. Porcelain door liner and oven bottom. Ten 28,000 BTU/hr. cast top burners with lift-off burner heads. Individual pilot for each burner. 12" x 12" cast top grates with aeration bowls. Heavy duty top grates and burner heads. Compression spring door hinge system for durability. 35,000 BTU/hr. Two standard ovens each measure 26 1/4"w x 22"d x 14 1/2"h. Thermostat adjusts from Low to 500 degrees F. One oven rack with four rack positions for each oven. 3/4" rear gas connection and gas pressure regulator. Total input: 350,000 BTH/hr.

### **Exterior Dimensions:**

32"d x 60"w x 58"h on 6" adjustable legs

V60-1	Natural Gas / 2 Standard Ovens
V60-2	Propane / 2 Standard Ovens

#### **STANDARD FEATURES**

- Fully MIG welded frame
- Stainless steel front, backriser, lift-off high shelf
- 6" Stainless steel adjustable legs
- 28,000 BTU/hr open top burners with lift-off heads
- Individual pilot for each burner
- 12" x 12" cast top grates with aeration bowls
- Welded crumb tray
- 35,000 BTU/hr standard oven cavity measures 26 1/4"d x 22"w x 14 1/2"h
- Oven thermostat adjusts from Low to 500°F
- One oven rack and four rack positions for each oven
- 3/4" rear gas connection and gas pressure regulator
- One year limited parts and labor warranty

## **ACCESSORIES** (Packaged & Sold Separately)

- ☐ Extra oven rack
- ☐ Extra rack guides (set of two)
- ☐ Reinforced backriser and high shelf for mounting salamander broiler
- ☐ Set of six casters (two locking)
- □ 11" high stainless steel flue riser in place of standard backriser and high shelf






# VALUE SERIES 60" GAS RESTAURANT RANGE 10 OPEN BURNERS


#### **INSTALLATION INSTRUCTIONS**

- 1. A pressure regulator sized for this unit is included. Natural gas 5.0" W.C., propane gas 10.0" W.C.
- 2. Gas line connecting to range must be 3/4" or larger. If flexible connectors are used, the inside diameter must be 3/4" or larger.
- An adequate ventilation system is required for commercial cooking equipment. Information may be obtained by writing to the National Fire Protection Association, 1 Batterymarch Park, Quincy, MA 02269, www.NFPA.org. When writing, refer to NFPA No. 96.
- These units are manufactured for installation in accordance with ANSZ223.1A (latest edition), National Fuel Gas Code. Copies may be obtained from The American Gas Association, 400 N Capitol St. NW, Washington, DC 20001, www.AGA.org.
- 5. Clearances Rear Sides
  Combustible 6" 10"
  Standard Oven Non-combustible 0" 0"
  Convection Oven Non-combustible Min. 4" 0"
- For proper combustion, install equipment on adjustable legs or casters provided with unit.
- 7. For proper combustion, install equipment on adjustable legs or casters provided with unit.

**NOTE:** In line with its policy to continually improve its product, Vulcan reserves the right to change materials and specifications without notice.

Specify type of gas when ordering. Specify altitude when above 2,000 feet.

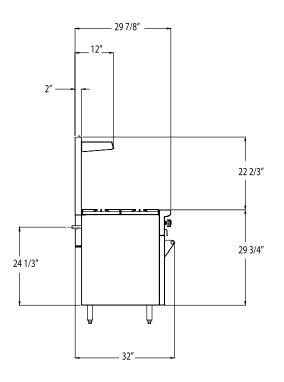

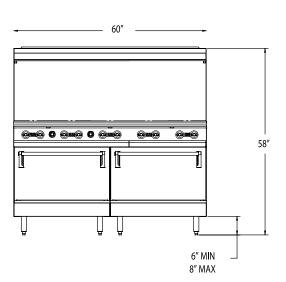

TOP CONFIGURATION	MODEL NUMBER	DESCRIPTION	TOTAL INPUT BTU / HR	SHIPPING WEIGHT LBS / KG
	V60-1	10 Burners / 2 Standard Ovens / Natural Gas	350,000	750 / 341
	V60-2	10 Burners / 2 Standard Ovens / Propane	350,000	750 / 341

This appliance is manufactured for commercial use only and is not intended for home use.



a division of ITW Food Equipment Group LLC

P.O. Box 696 Louisville, KY 40201 Toll-free: 1-800-814-2028 Local: 502-778-2791 Quote & Order Fax: 1-800-444-0602